


■ ATQ系列变压器 ATQ series transformer

结构及外形尺寸 Dimensions of structure and shape

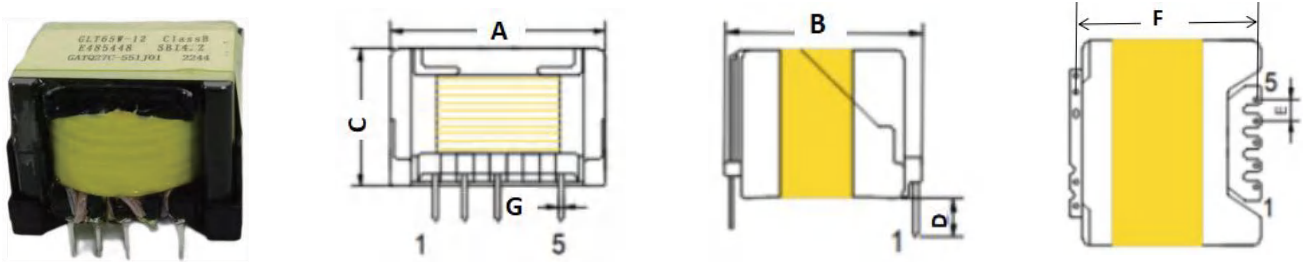

Part Number	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	D (mm)	G (mm)	Pins (Optional)
GATQ15	17 max	15 max	24 max	2.75±0.5	10.0±0.5	4.0±0.5	0.5±0.1	4+4
GATQ17	19 max	18 max	18 max	3.5±0.5	14.5±0.5	4.0±0.5	0.6±0.1	4+2
GATQ25	27 max	18 max	21 max	3.3±0.5	13.3±0.5	4.0±0.5	0.8±0.1	4+4
GATQ27	32 max	29 max	22 max	3.5±0.5	27.5±0.5	4.0±0.5	0.8±0.1	5+4
GATQ32	33 max	38 max	23 max	5.0±0.5	34.0±0.5	4.0±0.5	0.8±0.1	5+5

特性 Features

ATQ变压器具有体积小，高度低，工作频率高功率大、抗电强度高绝缘电阻高、恶劣环境工作稳定、抗电磁干扰能力强

ATQ transformer has small size, low height, high working frequency, high power, high electrical strength, high insulation resistance, stable work in harsh environment, strong ability to resist electromagnetic interference

工作温度范围:-40~125°C

Operating temperature range:-40~125°C

应用 Applications

精密仪器

Precision instruments

程控交换机模块电源

The Stored program control exchange module power supply

医疗仪器电源, 工业电源

Medical instrument power supply, industrial power supply

智能家用电器

Intelligent household appliances

★ 产品可以按客户要求定制

Products can be customized according to customer requirements